

A wide choice of formats, also in the tensioned version, with the Multiformat screen: surpassing the highest expectations of home cinema lovers.

Starting from two independent projection surfaces (a top masking surface and a rear projection surface), attached to two rollers: by synchronising these you can vary the format of the projection area, and obtain an image which is always edged in black, enhancing contrast. These are special, non-varnished anti-reflective black edges, with a width of 70 mm (while traditional edges are 30 or 50 mm wide).

The top surface is directly in contact with the rear surface, thanks to the vertical alignment of the rollers: this avoids the formation of shadows during projection. Planarity is ensured by the front drop of the surface, while the special anchoring to the roller eliminates any risks of horizontal crease marks. A perfect surface is possible at all times, thanks to a dedicated command that unrolls the surface completely, to facilitate cleaning operations. The winding is through Nice Era Mat radio integrated motors with remote control included. The case is white (RAL 9016), with brushed aluminium lateral ends, which completely mask the screws. The anchoring system is simple and super-quick, for easy installation procedures.



See page **81** for Technical data



Brushed Aluminium Ends ▲

There is a very ample variety of formats to choose from.

For projectors with a 4:3 aspect ratio the following formats are available:

- > 1.33 NTSC PAL 4:3
- > 1.60 16:10
- > 1.78 HDTV 16:9
- > 1.85 Wide
- > 2.35 Cinemascope 21:9

For projectors with a 16:9 aspect ratio the following formats are available:

- > 1.78 HDTV 16:9
- > 1.85 Wide
- > 2.35 Cinemascope 21:9

Two more formats, with height lower than that of the starting format, can be added according to choice.

Numerous solutions, but only one tensioning system: a classic. Two elastic cables depart from the base and are threaded through dedicated same-size eyelets, placed along the sides of the screen: the arch that forms laterally ensures a harmonious aesthetic impact and a crease-free rolling, despite the presence of the eyelets.

Create your own screen with the PSS

- > **Personalized dimensions:** width
- > **Formats:** 8 different configurations
- > **Motor type:** only radio integrated
- > **Case:** available only with case
- > **Case color:** standard in White Gloss. Optional in any other color for an extra cost
- > **Standard Drop:** from 10 to 40 cm
- > **Projection surface fall:** front only
- > **Side of command/motor:** right only

Projection Surfaces (see page 6)

- > ReferenceWhite 2 / ReferenceGrey 2
- > AmbientGrey 2 / AmbientGrey
- > VisionWhite / VisionWhitePro
- > VisionAcoustik / VisionMacroAcoustik
- > VisionRear DB / VisionRear

Standard Accessories

- > Kit with wall or ceiling mount brackets
- > Master remote control
- > Pilot remote control

Optional Accessories



- > Extension brackets for screens up to 60 cm

PSS Formats

1.33:1	1.60:1	1.78:1	1.85:1	2.35:1	2.40:1
4:3	16:10	16:9		21:9	

Multiformat Tensio Classic 70 mm borders

Aspect Ratio	Viewing Width		Viewing Height	Diagonal Inches		2° Aspect Ratio		Viewing Height		Diagonal Inches		3° Aspect Ratio		Viewing Height		Diagonal Inches		4° Aspect Ratio		Viewing Height		Diagonal Inches		5° Aspect Ratio		Viewing Height		Diagonal Inches		Overall Width	Overall Height	Surface Width	Surface Height	Standard Drop	Total Maximum Drop	Packaging Dimensions	Net Weight	Gross Weight
	C	D	N	D	N	D	N	D	N	D	N	D	N	D	N	A	B	F	G	P	mm	mm	kg	kg														
1,33 (4:3)	1790	1346	88	1,60	1119	83	1,78	1006	81	1,85	968	80	2,35	762	77	2250	1740	1930	1486	70	400	2263x300x330	34	39														
	2040	1534	100	1,60	1275	95	1,78	1146	92	1,85	1103	91	2,35	868	87	2500	1928	2180	1674	70	400	2513x300x330	40	45														
	2290	1722	113	1,60	1431	106	1,78	1287	103	1,85	1238	102	2,35	974	98	2750	2116	2430	1862	70	400	2763x300x330	47	52														
	2540	1910	125	1,60	1588	118	1,78	1427	115	1,85	1373	114	2,35	1081	109	3000	2304	2680	2050	70	400	3013x300x330	55	60														
	2790	2098	137	1,60	1744	130	1,78	1567	126	1,85	1508	125	2,35	1187	119	3250	2492	2930	2238	70	400	3263x300x330	58	63														
1,60	1790	1119	83	1,78	1006	81	1,85	968	80	2,35	762	77	2,40	746	76	2250	1513	1930	1259	70	400	2263x300x330	34	39														
	2040	1275	95	1,78	1146	92	1,85	1103	91	2,35	868	87	2,40	850	87	2500	1669	2180	1415	70	400	2513x300x330	40	45														
	2290	1431	106	1,78	1287	103	1,85	1238	102	2,35	974	98	2,40	954	98	2750	1825	2430	1571	70	400	2763x300x330	47	52														
	2540	1588	118	1,78	1427	115	1,85	1373	114	2,35	1081	109	2,40	1058	108	3000	1982	2680	1728	70	400	3013x300x330	55	60														
	2790	1744	130	1,78	1567	126	1,85	1508	125	2,35	1187	119	2,40	1163	119	3250	2138	2930	1884	70	400	3263x300x330	58	63														
1,78 (16:9)	1790	1006	81	1,85	968	80	2,35	762	77	2,40	746	76	-	-	-	2250	1400	1930	1146	70	400	2263x300x330	34	39														
	2040	1146	92	1,85	1103	91	2,35	868	87	2,40	850	87	-	-	-	2500	1540	2180	1286	70	400	2513x300x330	40	45														
	2290	1287	103	1,85	1238	102	2,35	974	98	2,40	954	98	-	-	-	2750	1681	2430	1427	70	400	2763x300x330	47	52														
	2540	1427	115	1,85	1373	114	2,35	1081	109	2,40	1058	108	-	-	-	3000	1821	2680	1567	70	400	3013x300x330	55	60														
	2790	1567	126	1,85	1508	125	2,35	1187	119	2,40	1163	119	-	-	-	3250	1961	2930	1707	70	400	3263x300x330	58	63														
1,85	1790	968	80	2,35	762	77	2,40	746	76	-	-	-	-	-	-	2250	1362	1930	1108	70	400	2263x300x330	34	39														
	2040	1103	91	2,35	868	87	2,40	850	87	-	-	-	-	-	-	2500	1497	2180	1243	70	400	2513x300x330	40	45														
	2290	1238	102	2,35	974	98	2,40	954	98	-	-	-	-	-	-	2750	1632	2430	1378	70	400	2763x300x330	47	52														
	2540	1373	114	2,35	1081	109	2,40	1058	108	-	-	-	-	-	-	3000	1767	2680	1513	70	400	3013x300x330	55	60														
	2790	1508	125	2,35	1187	119	2,40	1163	119	-	-	-	-	-	-	3250	1902	2930	1648	70	400	3263x300x330	58	63														
2,35 (21:9)	1790	755	76	2,40	746	76	-	-	-	-	-	-	-	-	-	2250	1149	1930	895	70	400	2263x300x330	34	39														
	2040	861	87	2,40	850	87	-	-	-	-	-	-	-	-	-	2500	1255	2180	1001	70	400	2513x300x330	40	45														
	2290	966	98	2,40	954	98	-	-	-	-	-	-	-	-	-	2750	1360	2430	1106	70	400	2763x300x330	47	52														
	2540	1072	109	2,40	1058	108	-	-	-	-	-	-	-	-	-	3000	1466	2680	1212	70	400	3013x300x330	55	60														
	2790	1177	119	2,40	1163	119	-	-	-	-	-	-	-	-	-	3250	1571	2930	1317	70	400	3263x300x330	58	63														

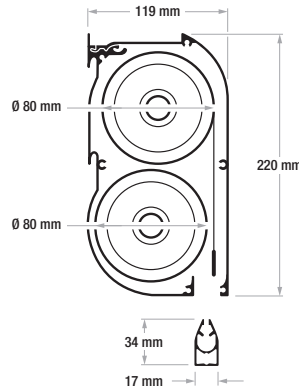

Surface Fireproof Certifications